


# HCLX Frame

Rectangular civil frame with 60mm flange for sealing services with an overall diameter greater than 100mm. Made in 6mm thickness steel.

## CHARACTERISTICS

- ◆ Available in three standard sizes: 180, 240 and 360.
- ◆ Designed to be bolted or casted into a wall or structure.
- ◆ Materials: Mild Steel, Stainless Steel.  
Other materials under request.
- ◆ To be sealed using standard or EMC HF blocks.
- ◆ To be sealed using special compression system (180, 240 or 360mm).

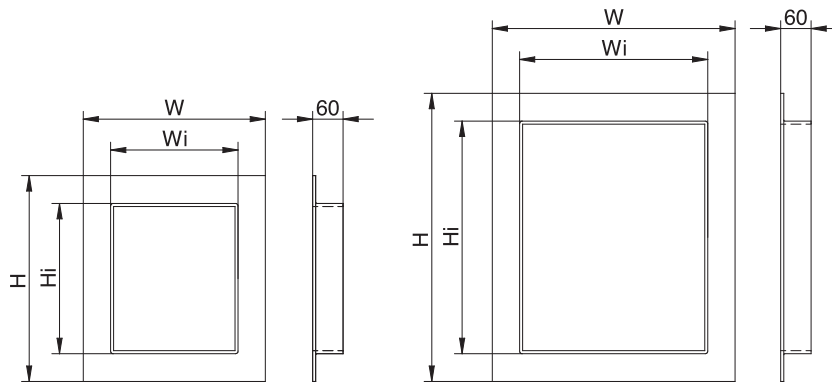

| DESCRIPTION | EXTERNAL DIMENSIONS (mm) |     |     |     | WEIGHT (Kg) |                 |
|-------------|--------------------------|-----|-----|-----|-------------|-----------------|
|             | W                        | H   | Wi  | Hi  | Mild Steel  | Stainless Steel |
| HCLX 180    | 300                      | 338 | 192 | 230 | 5,0         | 5,1             |
| HCLX 240    | 360                      | 400 | 252 | 292 | 6,3         | 6,5             |
| HCLX 360    | 480                      | 560 | 372 | 452 | 9,3         | 9,5             |

\*All dimensions are nominal values

◆ → Sealing Area

| SIZE | SEALING AREA (w x h) |
|------|----------------------|
| 180  | 180 x 180            |
| 240  | 240 x 240            |
| 360  | 360 x 360            |

◆ → Installation references

|                         | page |
|-------------------------|------|
| See assembly parts      | 66   |
| See accessories         | 76   |
| See installation guide  | 116  |
| See bolted instructions | 141  |
| See inspection check    | 158  |